



COPYRIGHT © 2009 EMCON
 ALL RIGHTS RESERVED. NO PART OF THIS PUBLICATION MAY BE REPRODUCED STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE, WITHOUT THE PERMISSION IN WRITING FROM EMCON.

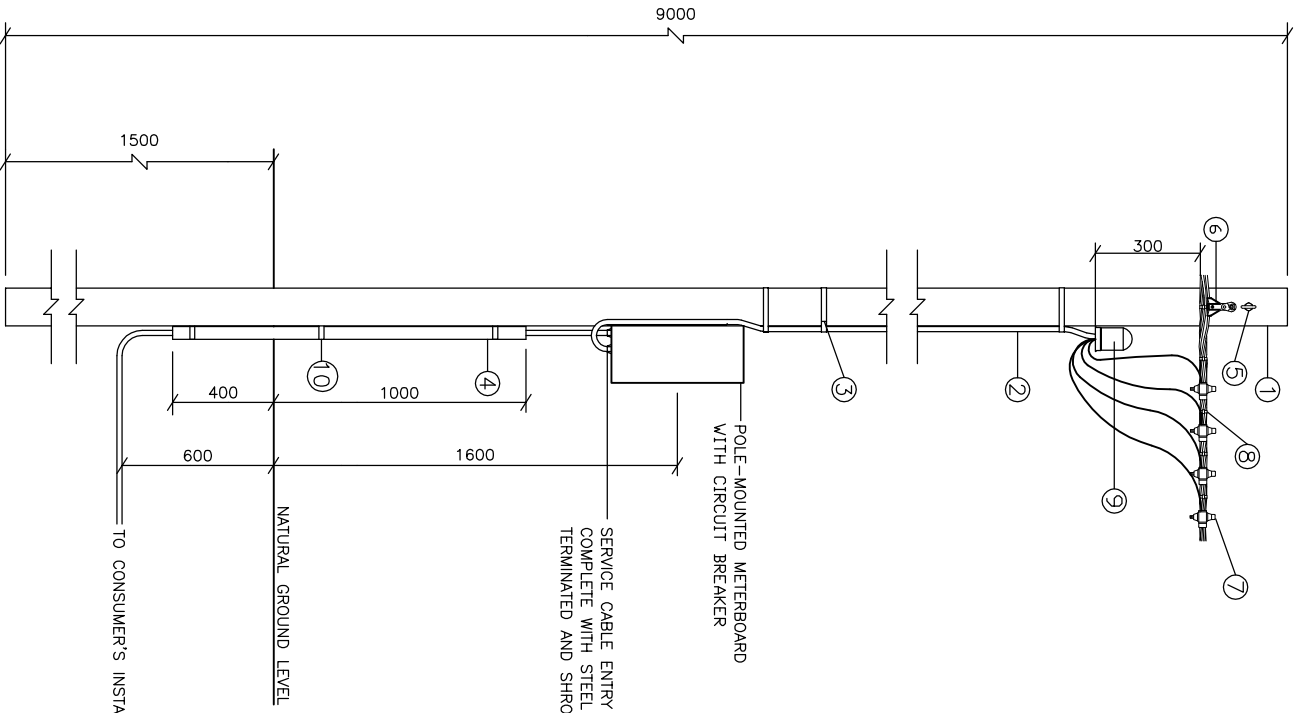

ITEM	DESCRIPTION	QTY	REMARKS
1	WOODEN POLE	1	9m LONG WITH TOP 140mm ϕ min.
2	SUPPLY CABLE	-	SIZE AND LENGTH AS REQUIRED
3	BAND-IT STRAPPING	8	20x0.7mm STAINLESS STEEL
4	KICK PIPE	1.4m	50mm ϕ HDPE
5	PIGTAIL BOLT ASSEMBLY	1	M16 C/W FSHPLTS, WSHRS, NUTS
6	SUSPENSION CLAMP ASSEMBLY	1	FOR ABC SUPPORTING CORE
7	TAP-OFF CONNECTORS	4	MAIN TO BRANCH CONNECTION
8	CABLE TIES FOR ABC	-	USE AS REQUIRED
9	CABLE HOOD	1	POLE BOX
10	GALV. SADDLES	4	FOR 50mm ϕ KICK PIPE

NOTES:

ELECTRICITY CONTROL BOARD



Box 2923
 Windhoek
 NAMIBIA
 Tel: (061) 374300
 Fax: (061) 374305

DRAWING TITLE
 LOW VOLTAGE AERIAL BUNDLED
 CONDUCTOR DISTRIBUTION: THREE PHASE
 SERVICE CONNECTION WITH METERBOARD

DESIGNED: A.K	DRAWN: J.W.S	REV: 01-2001
DRAWING No: STD-LVABC-14	SCALE: N.T.S	

ERROR: syntaxerror
OFFENDING COMMAND: --nostringval--

STACK:

/Title
()
/Subject
(D:20100127105658+02'00')
/ModDate
()
/Keywords
(PDFCreator Version 0.9.5)
/Creator
(D:20100127105658+02'00')
/CreationDate
(johnny)
/Author
-mark-